### COMPACT ELECTRIC TORQUE WRENCH PUMP

PE39 700 bar/10,000 psi



## 700 BAR (10,000 PSI) COMPACT ELECTRIC TORQUE WRENCH PUMP

The SPX PE39 is compact and capable of being used in a vertical or horizontal orientation. Based on proven pump design for reliability in rugged torque wrench applications to support operation and maintenance requirements.

#### **Quality means Lower Life-Cycle Costs:**


- Over 100,000 cycles
- Continuous duty up to 50°C (122°F) ambient
- Proven design = proven reliability

#### **Enhanced Usability:**

- Light weight and portable: 17.7 kg (39 lb)
- Removable control pendant (5 m/15 ft cord length)
- Removable 100 mm (4") calibration-capable gauge
- Universal Motor for reduced voltage applications (up to -20% nominal voltage)
- Vertical or horizontal operation
- Easy install cooling fan as option

#### **Designed with Safety in Mind:**

- Easily adjusted pressure regulator (relief) valve
- Fixed 103 bar (1,500 psi) retract relief valve pressure

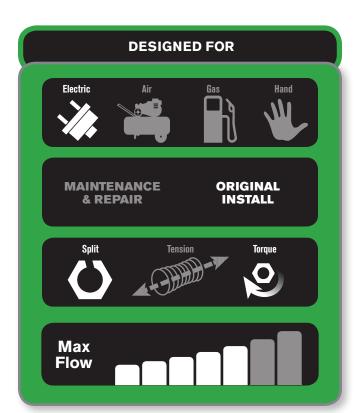



To be used with torque wrenches, pages 11-33



#### **Specifications and Dimensional Data**

**Size (L x W x H):** 35 cm x 27.4 cm x 60 cm 13.8" x 10.8" x 23.7"

Weight: 17.7 kg (39 lb) [without Oil]

**Maximum Oil Capacity:** (non-vented reservoir)

1.9 L (0.5 Gallons) [to fill line] 1.5 L (0.4 Gallons) [usable]

Operating Environment: -25°C to +50°C

(-13°F to +122°F)

(When operating near temperature extremes, it is recommended to use hydraulic oils that are rated for those temperatures. Refer to service manuals and cooling options)

Sound Level: 87 - 92 dBA (max)


**Pressure:** 0 - 700 bar (0 - 10,000 psi)


Typical Flow: 3.7 L/min - 0.64 L/min

(225 in<sup>3</sup>/min - 39 in<sup>3</sup>/min)

**Power:** 1.3 hp Universal Motor 110/115V - 50/60 Hz (14.5 amps) 220/230V - 50/60 Hz (7.2 amps)

(€

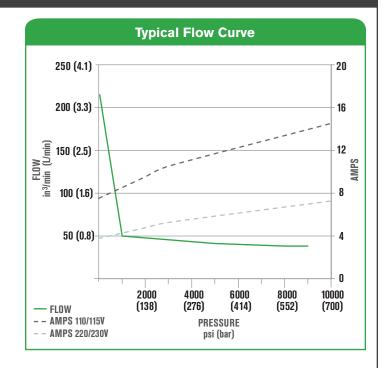



# 14.3 in 36.3 cm 12.8 in 32.5 cm 24.1 in 61.2 cm

Vertical or Horizontal Operation

#### **Ordering Information**

Order No. Description PE39YED1PR 110/115VAC

PE39YED1BPR 110/115VAC with cooling option

**PE39PED1PR** 220/230VAC

**PE39PED1BPR** 220/230VAC with cooling option

#### **OPTIONS**

 Auxiliary Cooling Fan (Field Installable)
 Order No. 3000610