



HYDRAULIC COUPLER

Maximum Operating Pressure: 5,000 PSI



Seal
(Folded before installation)

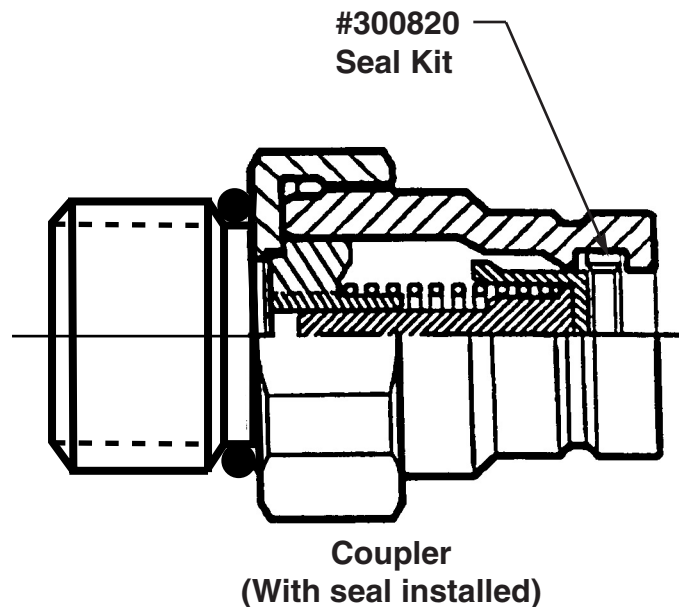

Coupler
(With seal installed)

**WARNING:** To help prevent personal injury,

- Do not disassemble this coupler! All other parts within this assembly are not serviceable!
- Do not use o-ring seals or backup rings in place of, or in addition to, the #300820 seal.