

CombiSump

Vertical long shaft sump pump, according to ISO 2858, EN 733, API 610 (VS4)



Johnson Pump, An SPX FLOW Brand

SPX FLOW Technology develops, manufactures and markets Johnson Pump branded positive displacement and centrifugal pumps in many market segments.

We support our customers with expert advice and service. Working in partnership, we combine our knowledge of the products and applications to the system knowledge of our customers. By thinking proactively, and anticipating potential problems, we aim to always provide a practical solution, whether based on standard or complete client specified executions.

We offer a 24 hours service to best ensure the minimum possible downtime of your production, either on-site or in our production facility. For more information about SPX FLOW Johnson Pump brand products please visit www.johnson-pump.com

Based in Charlotte, North Carolina, SPX Corporation (NYSE: SPW) is a global, multi-industry manufacturing leader with operations in more than 35 countries. The company's highly-specialized, engineered products and technologies are concentrated in Flow Technology and energy infrastructure. Many of SPX FLOWS's innovative solutions are playing a role in helping to meet rising global demand for electricity and processed foods and beverages, particularly in emerging markets.

The company's products include food processing systems for the food and beverage industry, critical Flow components for oil and gas processing, power transformers for utility companies, and cooling systems for power plants. For more information, please visit www.spx.com

CombiSump

COMBI SYSTEM

CombiSump is the sump pump solution for thin liquids. The pump is part of SPX FLOW Johnson Pump's Combi-system, a modular programme of single stage centrifugal pumps with a high degree of interchangeability of parts between the different pump constructions.

SPECIFICATIONS

The CombiSump is a range of centrifugal sump pumps, with the pump casing submerged into the liquid and a dry motor construction.

The hydraulic parts of these submersible pumps make use of the pump casings and impellers of the CombiPro, CombiChem or CombiNorm pumps, their respective hydraulic fields meeting API 610 (VS4), ISO 2858 (EN 22858) and EN 733.

The pump is driven by a customer specified or standard IEC flange electric motor 'V1(IM3011)' placed on a lantern piece mounted on the base plate. The power is transmitted through a flexible coupling and a long shaft.

The pump casings' pressure flange is connected to the discharge connection on the base plate.

TECHNICAL DATA

	COMBISUMP	COMBISUMPMAG*
MAX. CAPACITY	1500 m ³ /h	550 m ³ /h
MAX HEAD	160 m	160 m
MAX WORKING PRESSURE	1600 kPa**	1600 kPa**
MAX. TEMPERATURE	160°C	160°C
MAX. SPEED	3600 RPM	3600 RPM

* MAX WORKING PRESSURE
** DEPENDING ON MATERIALS

Typical product applications

COMBISUMPMAG

For applications in sensitive areas where it is imperative that the pumped media does not escape out into the environment nor contaminating fluids are able to invade the pumped media the hermetically enclosed shaft sealing option CombiSumpMAG is recommended.



From know-how to finding solutions

GENERAL INDUSTRY

CombiSump pumps can be used for all kinds of sump duties. Another known application is pumping cooling water when river or lake water is used for chilled cooling water processes.



PETROCHEMICAL INDUSTRY

CombiSump pumps are often used for draining waste water collecting basins. Typical process duties are e.g. drain pump or hydrocarbon condensate.



OFF SHORE

In Off Shore industries CombiSump pumps are used for several duties where it is desirable to have the electric motor at distance from the pumped liquid.



Features and benefits

ELECTRIC MOTOR

- mounted on a fabricated motor support lantern piece
- accurate alignment by means of adjusting bolts
- *customer specified or standard IEC flange motor 'V1 (IM 3011)'*

COUPLING

- standard fitted with flexible coupling
- *optionally available with membrane coupling or non-sparking coupling*
- *coupling guard to prevent entrance to the rotating parts*

DELIVERY CONNECTION

- placed on the baseplate
- flanges according to ISO 7005 PN 16, PN 20, PN 50
- flanges according to ANSI B16.5 150 lbs, 300 lbs
- *horizontal or vertical position possible*

BASEPLATE

- standard version is a rectangular plate
- round flange shaped plate is optional (API610)
- *can be adapted to the size of the pit according to customer specifications*
- *lifting lugs for easy maintenance*
- *provided with earthing boss*

COLUMN PIPE AND PUMP SHAFT

- situated below the baseplate
- consisting of one or more parts
- connects the pump casing with the baseplate
- *column pipe protects the shaft*
- *supports the eventual intermediate bearings*
- *sump depth according to customer specification*
- *design consists of 4 shaft groups*

PUMP CASING/IMPELLER



- impeller design for low NPSH values
- available impeller types: closed impeller and half open impeller with wear plate
- anti-rotation device at impeller inlet
- suction strainer
- *optimised hydraulic performance*
- *suitable for a wide range of liquids*
- *impeller protected from clogging*

BENEFITS

- Available in several materials
- High pump efficiency
- Suited for a wide span of duties
- Easy maintenance
- Compact, space saving construction
- Low maintenance cost
- Designed to meet specific lengths and application requirements
- Base plate designed to meet existing support arrangements



Bearings

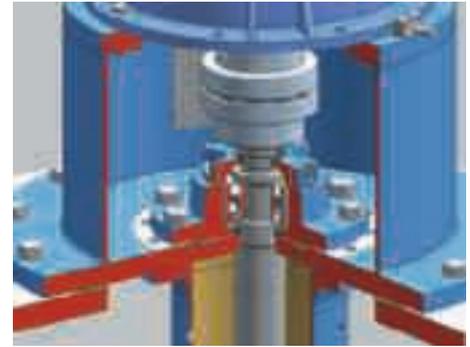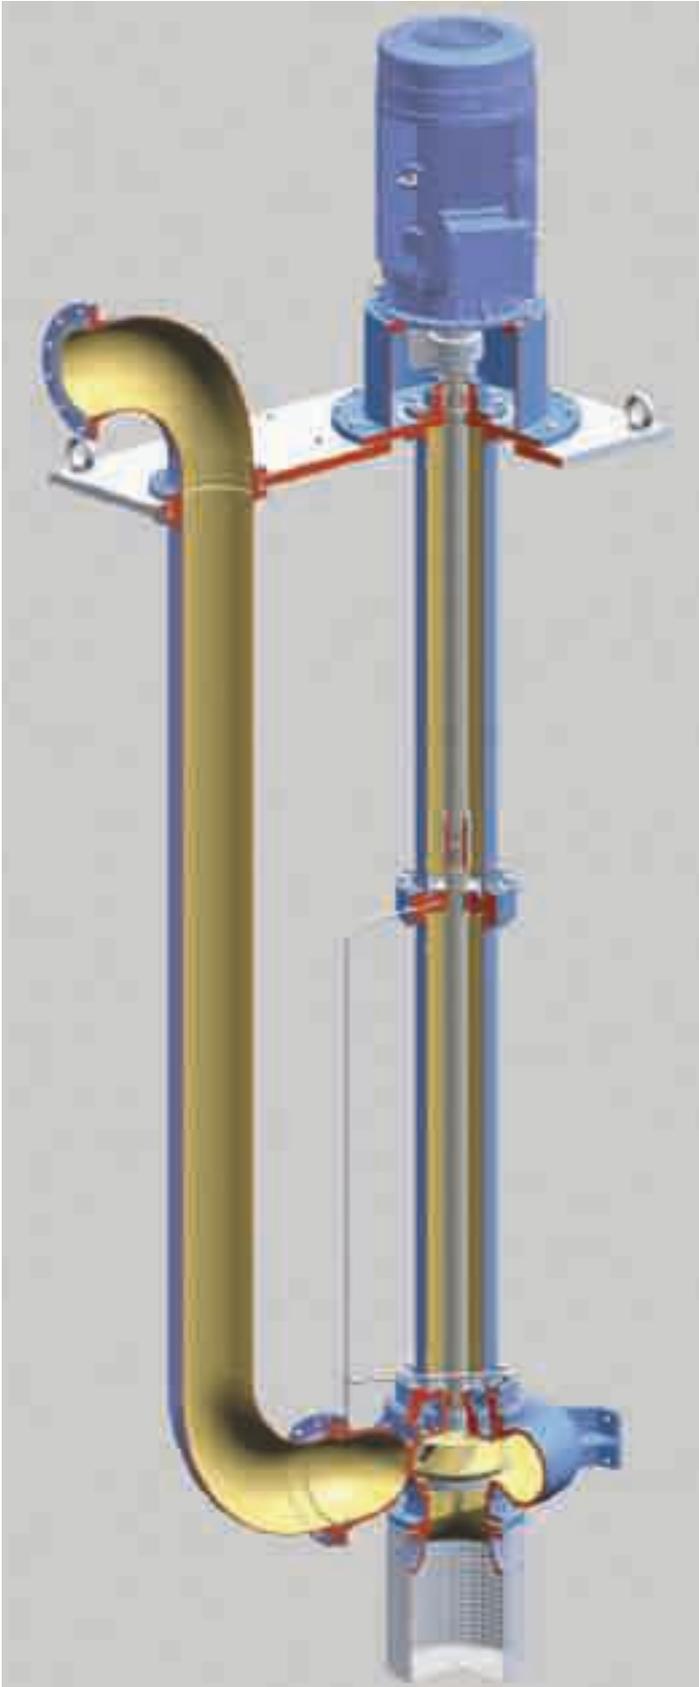

BALL BEARING CONSTRUCTION


- double-row angular-contact ball bearing for axial loads on the pump shaft.
- grease lubricated

The 'dry' part of the pump is provided with a double-row angular-contact ball bearing (two single row angular-contact ball bearings for bearing group 4) for bearing the axial loads of the pump shaft.

The shaft of the 'wet' part of the pump is provided with liquid lubricated slide bearings. The liquid is supplied directly from the discharge nozzle of the pump casing.

SLIDE BEARINGS

- pump shaft provided with slide bearings
- number of slide bearings depending on the length of the pump shaft
- *ceramic bearings, liquid lubricated*

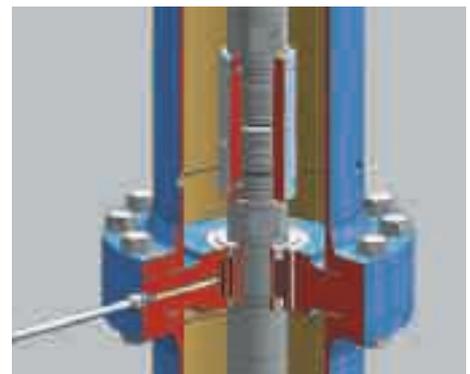


Shaft sealing


As standard, the baseplate is provided with an oil baffle for sealing the shaft passage. For pressure tank applications a mechanical seal or gland packing is optionally available. For applications that require a high level of total containment; keeping both the pumped media in and contaminating fluids out, a hermetically closed shaft sealing solution can be supplied. This pump known as the CombiSumpMag ensures a reliable, leak free operation and environmental protection.



Mecahanical seal

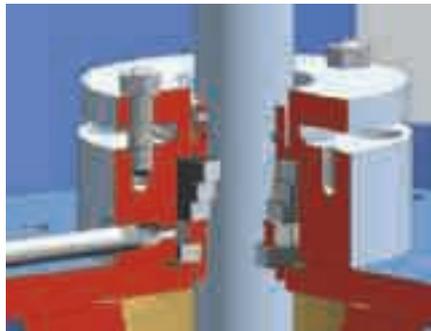

gland packing

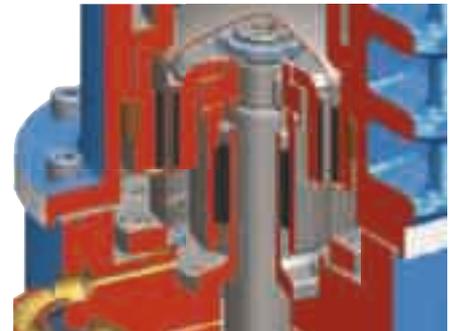

Seal less, magnetic drive

Materials

PARTS	STANDARD AVAILABLE MATERIALS		
	STAINLESS STEEL	CAST STEEL	CAST IRON
PUMP CASING	STAINLESS STEEL	CAST STEEL	CAST IRON
IMPELLER	STAINLESS STEEL	BRONZE	CAST IRON
SHAFT	STAINLESS STEEL	BEARING GROUP 4: STEEL	
STAND PIPE	STAINLESS STEEL	STEEL	
DELIVERY PIPE	STAINLESS STEEL	STEEL	
SLIDE BEARINGS	SiC-SiC		

ALTERNATIVE MATERIALS ACCORDING TO CUSTOMER SPECIFICATONS

Impeller types

The standard impeller is a closed impeller, but for contaminated liquids, containing fibres, a half open impeller is available on request.







Closed impeller



Half open impeller

Performance overview

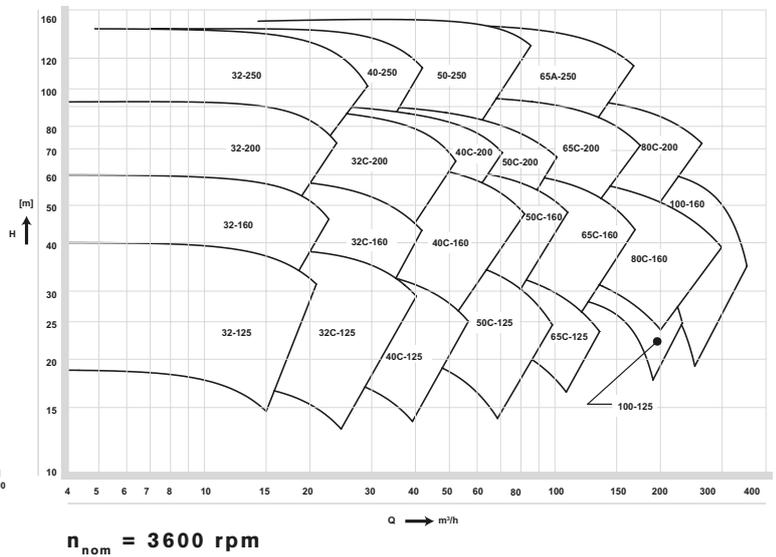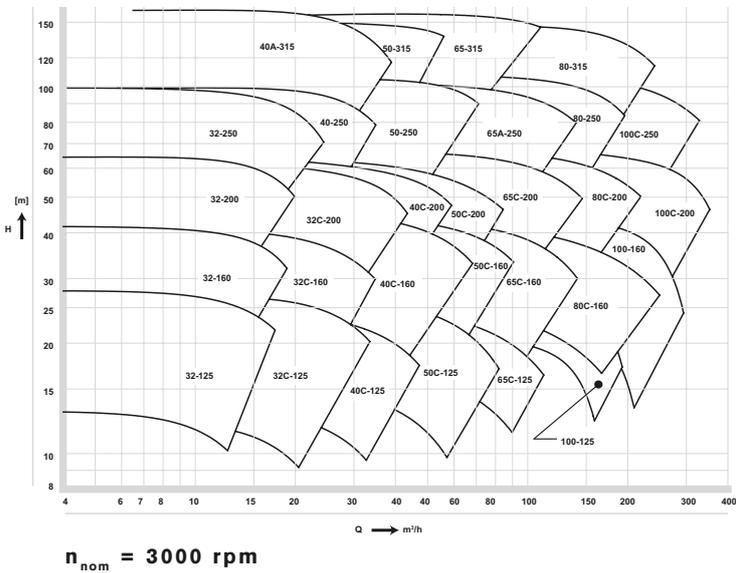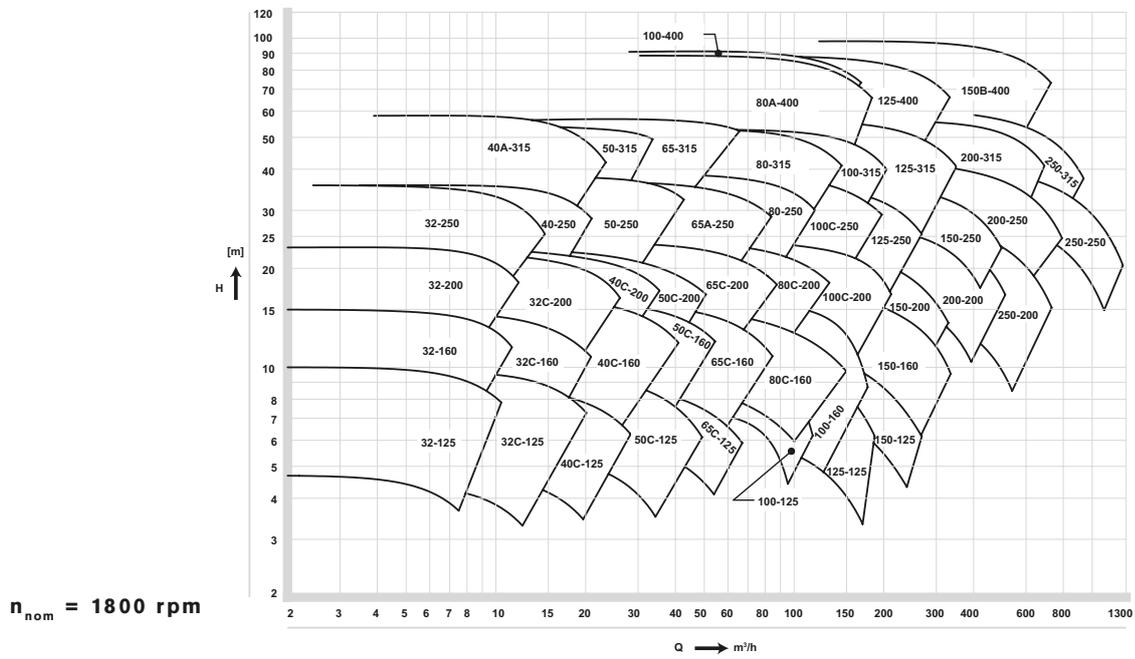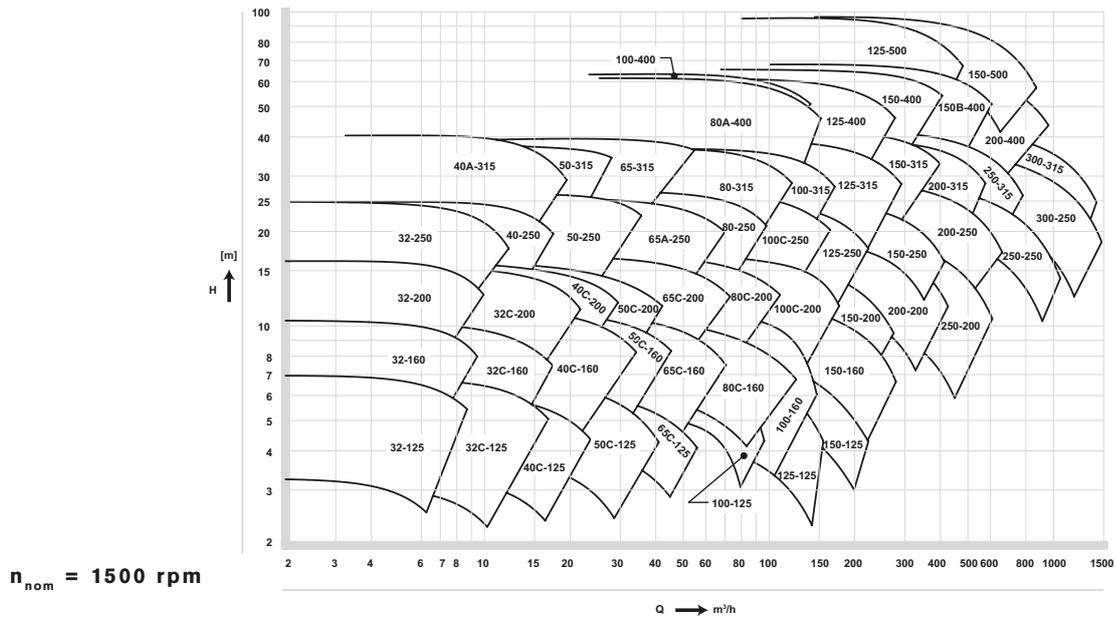

CombiSump

SPXFLOW

Vertical long shaft sump pump,
according to ISO 2858, EN 733,
API 610 (VS4)

FOR YOUR LOCAL REPRESENTATIVE:

www.spxflow.com/en/johnson-pump/where-to-buy/

SPX FLOW TECHNOLOGY ASSEN B.V.

Dr. A.F. Philipsweg 51, 9403 AD Assen

P.O. Box 9, 9400 AA Assen, THE NETHERLANDS

P: +31 (0)592 37 67 67

F: +31 (0)592 37 67 60

E: johnson-pump.nl.support@spxflow.com

SPX FLOW reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spx.com and www.johnson-pump.com.

The green ">" is a trademark of SPX FLOW, Inc.

JP_415_GB Version: 05/2018 Issued: 05/2018

COPYRIGHT © 2009, 2012, 2013, 2015, 2018 SPX FLOW, Inc.